



SUPER CAN INDUSTRIES, INC.

7007 Bristol Pike (Route 13)

Levittown, PA. 19057 USA

PHONE: 215-945-1075 FAX : 215-945-7888


The Air Source[®] MINI-MATE
Single Inlet Source - Four-Outlet Respirator Air Supply System

PRODUCT DESCRIPTION

The Air Source[®] Mini Mate is a complete air line respirator supply system that connects to any size DOT Cylinder, Bulk Cylinder rack outlet, or an other high pressure breathing air quality air supply. Available in Low Pressure (Under 3000 PSI) or High Pressure (Up to 5000 PSI) configurations and comes complete with adjustable high flow regulator, high pressure gauge that monitors cylinder supply pressure, low pressure gauge monitoring selected pressure, a large bore manifold for equal air distribution, four respirator outlet fittings specified by customer and safety relief valve. Unit is available with or without a low-pressure warning whistle assembly.

APPLICATIONS

- ◆ *For operation of up to four air line respirators either positive pressure or constant flow, or to supply up to four persons in level A chemical suits and sixty minute breathing apparatus, using the airline as the primary source for breathing air and suit cooling and the sixty minute SCBA as the back up air source.*
- ◆ *A very low cost, small, light weight, portable air supply system for remote operations such as routine tank cleaning, entry into sewers, digesters, wet wells, and other confined spaces.*
- ◆ *As a supply system for any pneumatic operated equipment such as HAZ MAT suits, Cooling Vest, Etc.*
- ◆ *For confined space or Haz Mat rescue operations capable of supplying up to four air line respirators with egress cylinders.*

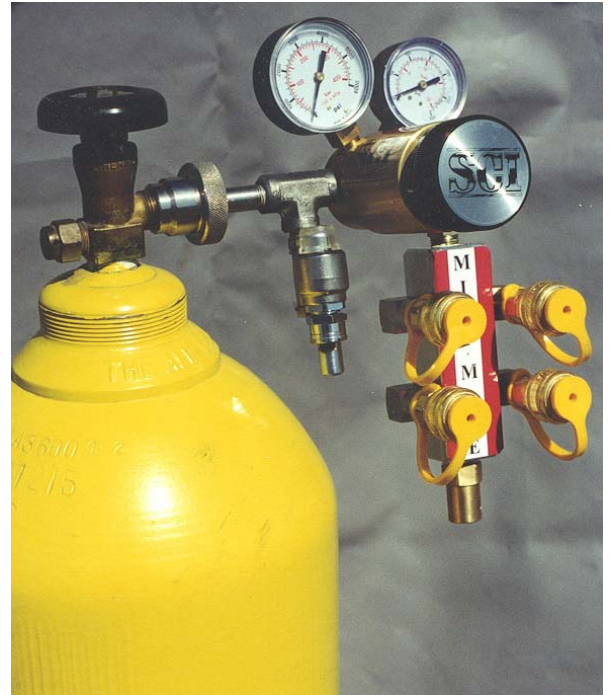

CONSTRUCTION SPECIFICATIONS

- ◆ Weight - 5.7 Lbs.
- ◆ Height - 11 ½ inches
- ◆ Width - 7 ¼ inches
- ◆ Depth - 5 ½ inches
- ◆ Manifold body constructed of 6061-T6 aluminum
- ◆ Inlet pressure gauge 0-6000 PSI
- ◆ Outlet pressure gauge 0-300 PSI
- ◆ Safety relief valve set at 125 PSI (OSHA Air line standard)
- ◆ Respirator fittings: Foster, Hansen, Snap-Tite, Schrader, and others available
- ◆ Available in low pressure (up to 3000 PSI) and high pressure (up to 5000 PSI) configurations
- ◆ Available with or without audible low air pressure alarm.