



## SUPER CAN INDUSTRIES, INC.

7007 Bristol Pike (Route 13)

Levittown, PA. 19057 USA

PHONE: 215-945-1075 FAX: 215-945-7888


### TOOLMATE PNEUMATIC TOOL SUPPLY SYSTEM

#### PRODUCT DESCRIPTION

- The Air Source<sup>®</sup> TOOLMATE is a portable pneumatic supply system for simultaneously supplying multiple pneumatic powered rescue tools at various operating pressures.
- Optional Vehicle bracket makes it a Semi Permanent “fixed” system.
- In the Vehicle bracket, the unit utilizes the vehicle high pressure air supply from onboard cascade.
- Easily removed from vehicle and piped air supply through high pressure
- Quick disconnects.
- When made portable, the unit utilizes SCBA cylinders as a supply source.
- Four (4) outlets allow tools of variable pressures to be operated simultaneously.

#### APPLICATIONS

- Very compact, light weight air supply system that can be a “fixed” system or portable supply.
- Option vehicle mounting allows the quick removal of the system .
- Can be kept as a portable system for vehicles without cascade air supplies.
- Equipped with Four (4) individual tool supply outlets, including one (1) dedicated air bag controller supply preset to 115 PSI, and one full manifold pressure outlet for AIR shoring equipment or Pneumatic tools operating at a pressure greater than 175 PSI.
- Eliminates the need for carrying 4 or 5 regulators and individual supplies for each tool.
- Adjustable Outlets permit the rescuer to individually control the pressure to the tool connected.

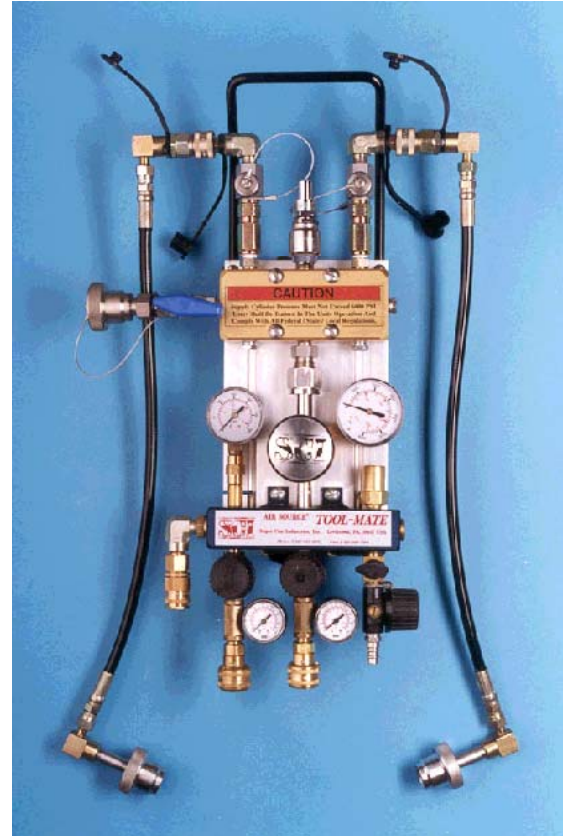

#### CONSTRUCTION & SPECIFICATIONS

- Vehicle Mounting height - 22” HIGH X 12½” WIDE X 6” DEEP
- Weighs only 15½ lb. with quick release bracket
- Manifolds constructed of 6061-T6 Aircraft Aluminum
- Anodized and color coded manifolds for safety and durability.
- One 115-PSI Air Bag Controller outlet with on/off valve and quick disconnect plug.
- Two adjustable pressure outlets from 5 PSI to 175 PSI with quick disconnect sockets and gauges.
- One Full manifold pressure outlet (275-300 PSI) with quick disconnect socket.
- Designed for 5000 PSI Inlet Air Pressures, and all hoses are equipped with 12,000 PSI rated
- Quick Disconnect couplings, for ease of use and safety.

#### OPTIONAL FEATURES

- High Pressure Outlet allows high pressure lines to be connected in line or additional regulators
- Additional High Pressure Inlet Hose Assemblies to connect 3, 4, 5, or 6 cylinders.
- Low Pressure Inlet assembly.
- Vehicle Mounting Bracket

